


Pillar Profiles

SP-Profiles

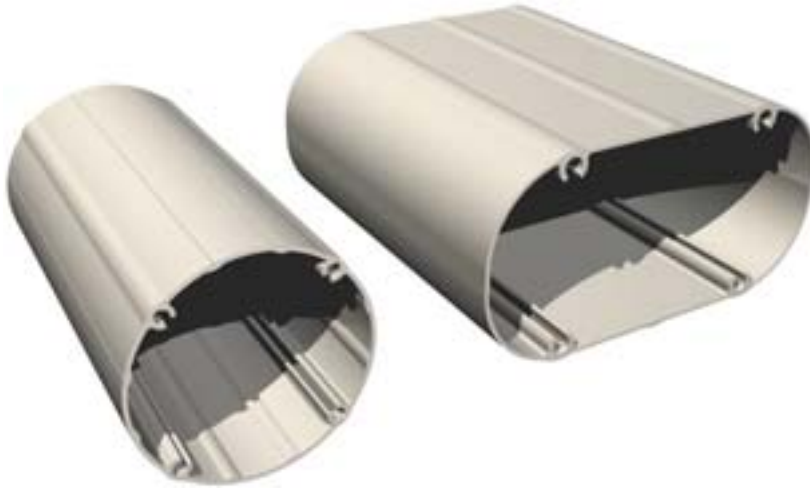

Features

- for the assembly of any type of frames, tables etc.
- aluminium, anodized or powder-coated (RAL-colours)
- made according to DIN 17615
- light, nice design

Technical Data

	SP 100	SP 200
dimensions (W x H)	Ø 102.3 mm	194.6 x 102 mm
length	up to 3 m (special lengths upon request)	
weight	2,090 g/m	3,600 g/m
	4 hollow indentions, Ø 5.55 mm for M6	4 hollow indentions, Ø 9 mm
inertia moment I_x	91.18 cm ⁴	537.57 cm ⁴
inertia moment I_y	91.18 cm ⁴	235.79 cm ⁴
moment of resistance W_x	18.24 cm ³	53.76 cm ³
moment of resistance W_y	18.24 cm ³	4.72 cm ³

Ordering Data

profile designation	Art. No: L = 1000 Art. No: L = 3000
SP 100 natural anodized	208 007 1000 208 007 3000
SP 100 light grey	208 007 1001 208 007 3001
SP 100 anthracite	208 007 1002 208 007 3002
SP 200 natural anodized	208 004 1000 208 004 3000
SP 200 light grey	208 004 1001 208 004 3001
SP 200 anthracite	208 004 1002 208 004 3002

Dimension Drawings

